HARVESTING SOLUTIONS / ENGLISH EDITION

Maize & grass silage systems.

Choose the cutting system. Specify the complete package.

Row-independent maize harvesters, single-row machines and grass silage systems from Türkiye.



MAIZE HARVESTING / A2Z4RISM-290



GATHERING HEADER / A2Z4RISM-290



TWO-ROW HARVESTING / A2ZTRCG-120



GRASS SILAGE / A2ZDC180

A clear route to the right machine.

Maize cutting and grass harvesting stay separate. Follow a product code for specifications and field views.

MAIZE SILAGE

SELECTION GUIDE / 03

A2Z4RISM-290	4-Row Row-Independent Harvester	**04**
A2Z3RISM-220	3-Row Row-Independent Harvester	**05**
A2ZTRCG-120	2-Row Maize & Grass Harvester	**06**
A2ZSR	Single-Row Maize Harvesters	**07**
A2ZSMC	Stationary Maize Chopper	**08**

The single-row page covers both articulated and hydraulic-control listings: A2ZSRF / A2ZSRH.

GRASS SILAGE

SELECTION GUIDE / 09

A2ZDC180	Double-Chop Grass Harvester 1800	**10**
A2ZDC150	Double-Chop Grass Harvester 1500	**11**
A2ZGCL	Coupling-Arm Grass Harvester	**12**
A2ZGT130	Trailed Grass Harvester	**13**
A2ZGAT	Articulated Grass Harvester	**14**

IN THE FIELD / 15-19

Start with the crop-handling route.

Compare row-independent, single-row and stationary processing arrangements before choosing width and tractor power.

A2Z model	Harvesting arrangement	Working width	Tractor power	PTO (rpm)
A2Z4RISM-290	4-row, row-independent	2900 mm	160 HP min.	1000
A2Z3RISM-220	3-row, row-independent	2200 mm	100 HP	750 or 1000
A2ZTRCG-120	2-row, row-independent	1200 mm	65 HP	540 / 750 / 1000
A2ZSRF / SRH	Single-row maize cutting	1 row	Package-specific	540
A2ZSMC	Stationary, pre-cut stalks	Not a cutting header	Package-specific	540 min., as listed

ROW-INDEPENDENT

Compare the three header widths. Kernel processing and feed reverse are listed as standard on the four-row model; they are not assumed standard across the range.

SINGLE-ROW

Articulated and hydraulic-control versions are presented together because their published tables and photographs are shared. Specify the folding and control package.

STATIONARY

This machine processes stalks that are already cut. It has a feed table rather than a standing-crop cutting header.

Capacity, travel speed and chop-length figures are manufacturer references, not guaranteed outputs. Crop maturity, moisture, feed conditions, knife setting and tractor setup affect results. Front or rear mounting and pickup attachments require the selected machine package.

4-Row Row-Independent Harvester

A2Z4RISM-290

A four-row maize harvester with interchangeable header options.









One machine. Two crop-handling routes.

Four horizontal feed drums supply the chopping flywheel. Kernel processing and remotely controlled feed reverse form the core package. Select the maize header or optional grass pickup for the crop.

KEY BENEFITS

Crop flexibility. Interchangeable header options

Feed control. Four-speed transmission

Discharge. 360° spout rotation

Machine profile, tractor-mounted setup and two views of the gathering header.

Family photographs; fitted equipment may vary. * Rated capacity and chop length depend on crop and operating conditions.

TECHNICAL SELECTION

SOURCE DATA

Specification	Value
Working width	2900 mm
Overall width	3000 mm
Length	2870 mm
Working / transport height	4850 / 2900 mm
Weight	2450 kg
Published capacity*	90-100 t/h
Header cutting knives	8
Chopping knives / paddles	12 / 12
Horizontal feed drums	4, transmission-driven

Specification	Value
Spout rotation	360°
PTO speed	1000 rpm
Minimum tractor power	160 HP
Kernel processor	Standard
Feed reverse	Standard; remotely controlled
Wheels / tyre size	2 / 185 R14C
Feed transmission	4 speeds; 16 combinations listed
Optional headers	Maize cutting / grass pickup

Working width: 2900 mm; overall width: 3000 mm. Final feed ratios and header follow the selected package.

3-Row Row-Independent Harvester

A2Z3RISM-220

A 2.20 m row-independent header with a four-drum feed system.







Maize harvesting beside the crop edge and a closer look at the gathering header.

A wider pass with controlled discharge.

A three-point-mounted maize harvester with a four-drum feed system. Hydraulic and electronic spout control directs the chopped crop; the included sharpening device supports routine knife maintenance.

KEY BENEFITS

Maintenance. Sharpening device included

Feed system. Four feeding drums

Attachment. Three-point linkage

Family photographs; fitted equipment may vary. * Rated capacity and chop length depend on crop and operating conditions.

TECHNICAL SELECTION

Specification	Value
Working width	2200 mm
Length x width x height	2700 x 2500 x 4100 mm
Weight	2000 kg
Published capacity*	70-80 t/h
Tractor power	100 HP
PTO speed	750 or 1000 rpm
Chopping knives	12
Blower paddles	12

SOURCE DATA

Specification	Value
Feeding drums	4
Support wheels / shafts	2 / 2
Header cutting system	Saw-type knives
Tractor connection	Three-point linkage
Sharpening device	Standard
Spout controls	Hydraulic and electronic
Spout rotation	360°
Finish	Epoxy primer; acrylic topcoat

2-Row Maize & Grass Harvester

A2ZTRCG-120

A compact row-independent package with a published 65 HP requirement.









The two-row family in work: complete setup, drive side and cutting-drum detail.

Family photographs; fitted equipment may vary. * Rated capacity and chop length depend on crop and operating conditions.

Row-independent cutting in a compact width.

The compact row-independent header handles maize and green forage. A single cutting drum feeds the chopping unit. Match the PTO setting and tractor arrangement to the selected package.

KEY BENEFITS

Crop choice. Maize and green forage

Chopping unit. 12 knives and 12 paddles

PTO choices. 540, 750 or 1000 rpm

TECHNICAL SELECTION

Specification	Value
Working width	1200 mm
Height	4350 mm
Rear / side width	1870 / 3300 mm
Weight	1240 kg
Published capacity*	40-50 t/h
Published travel speed*	Approx. 10 km/h

SOURCE DATA

Specification	Value
Cutting drums	1
Chopping knives	12
Blower paddles	12
PTO speed	540 / 750 / 1000 rpm
Tractor power	65 HP
Tyre marking	175 x 70 x 13

Field footage shows family variants; dimensions and required power follow the tabulated machine.

Single-Row Maize Harvesters

A2ZSR

Rear-folding transport and hydraulic-control choices for single-row maize harvesting.





Single-row maize harvesting with the trailer alongside the working machine.

Family photographs; fitted equipment may vary. * Rated capacity and chop length depend on crop and operating conditions.

Follow one crop row. Plan transport clearly.

Choose the rear-folding articulated version or the hydraulic-control package. Both published references use a knife-chopping unit and three-point linkage. Specify the required transport folding and control arrangement.

KEY BENEFITS

Transport. Rear-folding articulated version

Chop length. Published 3-5 mm setting

Mounting. Three-point linkage

TECHNICAL SELECTION

Specification	Value
A2Z model references	A2ZSRF: articulated / A2ZSRH: hydraulic-control
Length x width x height	2500 x 2300 x 3500 mm
Header cutting knives	2
Chopping knives	12
PTO speed	540 rpm; SRH listing states minimum

SOURCE DATA

Specification	Value
Published chop length*	3-5 mm
Tractor connection	Three-point linkage
Published travel speed*	10 km/h
Published capacity*	35 t/h
Tyre marking / pressure	500 x 8 in / 29 psi

Articulated and hydraulic-control references share published core dimensions and cutting data; equipment is specified separately.

Stationary Maize Chopper

A2ZSMC

PTO-driven chopping for maize that has already been cut.







Feeding pre-cut stalks and a closer view of the stationary machine's feed table.

Family photographs; fitted equipment may vary. * Rated capacity and chop length depend on crop and operating conditions.

Bring the cut crop to the chopper.

A feed table delivers pre-cut maize to the chopping unit. PTO drive powers stationary processing; the sharpening arrangement and opening spout housing support knife maintenance.

Use. Pre-cut maize processing

Knife care. Sharpening arrangement

Drive. Tractor PTO

TECHNICAL SELECTION **SOURCE DATA**

Specification	Value
Application	Stationary processing; pre-cut maize
Length x width x height	2600 x 2150 x 3400 mm
Weight	600 kg
Chopping knives	12
PTO speed	540 rpm minimum, as published
Tractor connection	Three-point linkage
Published capacity*	15-20 t/h
Knife sharpening	On-machine arrangement

Published tractor-power data are invalid; required power will be specified with the selected machine.

Choose chopping action and attachment.

Double-chop and conventional grass systems have different knife, hydraulic and tractor specifications.

A2Z model	System	Working width	Power reference	Height / discharge
A2ZDC180	Double chop	1800 mm	70 HP	Hydraulic functions
A2ZDC150	Double chop	1500 mm	45 kW / 60 HP	Hydraulic functions
A2ZGCL	Coupling-arm	1100-1300 mm	Not published	Tool-free setting; hydraulic spout
A2ZGT130	Trailed listing	1300 mm	45 HP	Hydraulic height and spout
A2ZGAT	Articulated, 3-point	Quote-specific	Not published	Linkage lift; hydraulic spout

DOUBLE-CHOP SYSTEMS

Primary knives cut the forage; a second chopping stage processes it again. The 1500 and 1800 packages have separate knife counts and power references.

ATTACHMENT CHOICES

Coupling-arm, trailed and articulated listings have their own schedules. Shared family photography does not establish identical hitch equipment.

CROP & TRACTOR BRIEF

State grass or forage type, intended fresh feeding or silage use, tractor linkage, PTO and trailer arrangement. Match those requirements to the selected machine.

Technical tables follow the current product listings. Unpublished values are left open, and width ranges are not converted into invented model configurations. Rated capacity and chop length depend on crop and operating conditions.

Double-Chop Grass Harvester 1800

A2ZDC180

A 1.80 m double-chop system with hydraulic discharge control.





The 1800 double-chop family cutting grass and loading the collection trailer.

Family photographs; fitted equipment may vary. * Rated capacity and chop length depend on crop and operating conditions.

Cut first. Chop again. Direct the flow.

Pivoting primary knives cut the crop before the flywheel chops it again. Hydraulic functions control cutting height, spout lift, rotation and discharge. A wider double-chop package for grass and other forage crops.

KEY BENEFITS

Two-stage cutting. Primary rotor and chopping flywheel

Hydraulic control. Cutting height and discharge

Forage crops. Grasses, cereals and legumes

TECHNICAL SELECTION

Specification	Value
Working width	1800 mm
Length / overall width	2870 / 2820 mm
Weight	1270 kg
Published capacity*	40-55 t/h
Primary cutting knives	36
Flywheel chopping knives	12

SOURCE DATA

Specification	Value
Blower paddles	12
Spout rotation	360°
PTO speed	540 rpm
Tractor power	70 HP
Tyres	1 x 10.0/80-12 IMP; 1 x 5.50-16 TD16

Double-Chop Grass Harvester 1500

A2ZDC150

A 1.50 m double-chop package with its own knife and power specification.





A closer view of the double-chop cutting unit during the working pass.

The manufacturer photograph shows the cutting assembly. * Published chop length depends on crop and operating conditions.

Two-stage chopping for a 1.50 m pass.

Primary cutting knives and a second chopping stage prepare green forage for silage or daily feeding. Hydraulic adjustment controls cutting height and discharge. This package has its own knife counts and power reference.

KEY BENEFITS

Double chopping. Separate primary and second stages

Crop use. Green forage and legumes

Hydraulics. Height and discharge functions

TECHNICAL SELECTION

SOURCE DATA

Specification	Value
Working width	1500 mm
Length / overall width	1850 / 2500 mm
Weight	1100 kg
Published average cut length*	5-8 cm
Primary cutting knives	32

Specification	Value
Second-stage chopping knives	8
Tractor connection	Three-point linkage, as published
Power reference	45 kW / 60 HP, as published
Wheels / tyre size	2 / 175 x 70 R13
PTO speed	540 rpm

Height is not published. This table follows the current 1500 listing; other manufacturer pages describe different versions.

Coupling-Arm Grass Harvester

A2ZGCL

Grass and fine-stem forage cutting with lateral adjustment.





The coupling-arm grass-harvester family working beside the tractor.

Family photographs; fitted equipment may vary. * Rated capacity and chop length depend on crop and operating conditions.

Set the machine around the crop line.

Tool-free adjustment sets working position and cutting height. The hydraulic spout directs discharge. Choose the required width and rotor option together to match the forage crop and tractor arrangement.

KEY BENEFITS

Positioning. 300 mm lateral adjustment

Setup. Tool-free height adjustment

Discharge. Hydraulic spout arrangement

TECHNICAL SELECTION

Specification	Value
Published working-width range	1100-1300 mm
Published knife-count options	18 / 21 / 24; width mapping not stated
Height	3500 mm
PTO speed	540 rpm
Tractor connection	Three-point linkage, as published
Lateral adjustment	300 mm
Spout	Hydraulic
Tyre marking / pressure	500 x 8 in / 29 psi

SOURCE DATA

MATCH THE MACHINE TO YOUR WORK

Select the working width and knife count together. The published range and three rotor options are not paired into verified configurations.

Width and knife-count options are listed independently; no one-to-one configuration mapping is implied.

Trailed Grass Harvester

A2ZGT130

A 1.30 m forage-cutting package with hydraulic height control.



Trailed-family photograph; final hitch and trailer arrangements follow the selected package.

Set the cutting height from the hydraulic system.

A grass-cutting package with a knife rotor and hydraulic height control. Spout and flap controls support machine setting and discharge. Specify the tractor, coupling and trailer arrangement together.

KEY BENEFITS

Height control. Hydraulic cylinder adjustment

Discharge. Hydraulic spout and flap

Cutting rotor. 21 knives

Family photographs; fitted equipment may vary. * Rated capacity and chop length depend on crop and operating conditions.

TECHNICAL SELECTION

Specification	Value
Working width	1300 mm
Height	3300 mm
Cutting knives	21
PTO speed	540 rpm
Tractor power	45 HP
Tyre marking	500 x 8 in
Cutting-height adjustment	Hydraulic cylinder
Spout / flap control	Hydraulic

SOURCE DATA

MATCH THE MACHINE TO YOUR WORK

State the intended tractor and trailer arrangement. The trailed package has its own width, knife count and hydraulic-height adjustment.

Family photograph; the selected trailed package defines the tractor and trailer coupling.

Articulated Grass Harvester

A2ZGAT

A three-point grass harvester with a distinct articulated attachment.



Articulated grass-harvester family with three-point tractor attachment.

Family photographs; fitted equipment may vary. * Rated capacity and chop length depend on crop and operating conditions.

Lift the cutting unit with the tractor linkage.

Three-point attachment lets the tractor linkage lift the machine. An independent hydraulic arrangement controls the spout and discharge flap. This version is intended for fine-stem forage such as grasses, legumes and alfalfa.

KEY BENEFITS

Mounting. Three-point linkage

Movement. Articulated attachment

Discharge. Hydraulic spout and flap

TECHNICAL SELECTION

Specification	Value
Crop application	Fine-stem forage, legumes and alfalfa
Tractor connection	Three-point linkage
Attachment	Articulated frame
Lifting	Through tractor hydraulic linkage
Spout / discharge flap	Independent hydraulic arrangement

SOURCE DATA

MATCH THE MACHINE TO YOUR WORK

State the crop, tractor linkage and trailer arrangement. Working width, power and dimensions need a model-specific quotation.

Dimensions, weight and power are not published on the current product page; the selected machine offer will state them.

Maize systems in use.

FIELD GALLERY / 01 OF 05

Real working scenes from the manufacturer's official channel. Follow the original video or return to the matching specification.

A2Z4RISM-290 M4-01




Maize harvest from above

The row-independent header cuts beside the crop edge while the spout loads a following trailer.

WATCH THE FIELD VIDEO

SPECIFICATION / 4

A2Z4RISM-290 M4-02

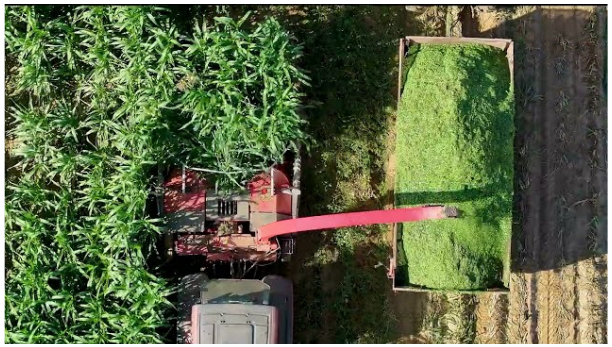

Sorghum harvest from above

A second crop demonstration shows the four-row family working alongside the collection trailer.

WATCH THE FIELD VIDEO

SPECIFICATION / 4

A2Z3RISM-220 M3-01



A close view of the maize header

The gathering rotors, augers and crop guides are visible at the start of the working line.

WATCH THE FIELD VIDEO

SPECIFICATION / 5

Source: original manufacturer YouTube demonstrations. Scenes show family variants; colour, row count, hitch and fitted equipment may differ from the selected order. Manufacturer branding is removed without changing the illustrated working arrangement.

Maize systems in use.

FIELD GALLERY / 02 OF 05

Real working scenes from the manufacturer's official channel. Follow the original video or return to the matching specification.

A2Z3RISM-220 M3-02



Cutting along the maize edge

The three-row harvester works beside standing maize and discharges into the collection vehicle.

WATCH THE FIELD VIDEO

SPECIFICATION / 5

A2ZTRCG-120 M2-01



Two-row harvesting from behind

The compact row-independent header follows the crop edge while the trailer receives chopped forage.

WATCH THE FIELD VIDEO

SPECIFICATION / 6

A2ZTRCG-120 M2-02



The drive side during harvesting

A closer rear-side view shows the transmission cover, frame and support-wheel arrangement.

WATCH THE FIELD VIDEO

SPECIFICATION / 6

Source: original manufacturer YouTube demonstrations. Scenes show family variants; colour, row count, hitch and fitted equipment may differ from the selected order. Manufacturer branding is removed without changing the illustrated working arrangement.

Maize systems in use.

FIELD GALLERY / 03 OF 05

Real working scenes from the manufacturer's official channel. Follow the original video or return to the matching specification.

A2ZSR SR-01



Single-row maize harvesting

The narrow cutting head works alongside the tractor and directs the chopped maize to a trailer.

WATCH THE FIELD VIDEO

SPECIFICATION / 7

A2ZSMC ST-01



Feeding pre-cut maize

The feed table receives already-cut stalks in a stationary processing setup.

WATCH THE FIELD VIDEO

SPECIFICATION / 8

A2Z3RISM-220 PU-01



Grass pickup attachment at work

Pickup tines lift a prepared windrow into the header. The filmed machine is the three-row family.

WATCH THE FIELD VIDEO

SPECIFICATION / 5

Source: original manufacturer YouTube demonstrations. Scenes show family variants; colour, row count, hitch and fitted equipment may differ from the selected order. Manufacturer branding is removed without changing the illustrated working arrangement.

Grass systems in the field.

FIELD GALLERY / 04 OF 05

Real working scenes from the manufacturer's official channel. Follow the original video or return to the matching specification.

A2ZDC180 D18-01



Double chopping through the field

The 1800 demonstration shows the grass cutting line and the trailer loading arrangement.

WATCH THE FIELD VIDEO

SPECIFICATION / 10

A2ZDC180 D18-02



A pass along the cut swath

A wider working view shows standing crop, the harvested strip and the receiving trailer.

WATCH THE FIELD VIDEO

SPECIFICATION / 10

A2ZDC150 D15-01



Primary cutting unit in work

A close view of the double-chop family shows the cutting housing and field-side wheel.

WATCH THE FIELD VIDEO

SPECIFICATION / 11

Source: original manufacturer YouTube demonstrations. Scenes show family variants; colour, row count, hitch and fitted equipment may differ from the selected order. Manufacturer branding is removed without changing the illustrated working arrangement.

Grass systems in the field.

FIELD GALLERY / 05 OF 05

Real working scenes from the manufacturer's official channel. Follow the original video or return to the matching specification.

A2ZDC150 D15-02



Discharge into the trailer

The curved spout directs chopped forage into the trailer during the same double-chop demonstration.

WATCH THE FIELD VIDEO

SPECIFICATION / 11

A2ZGCL GCL-01



Grass harvesting beside the tractor

The manufacturer identifies this working demonstration as its coupling-arm grass harvester.

WATCH THE FIELD VIDEO

SPECIFICATION / 12

A2ZGCL GCL-02



The grass-cutting line

A wider view shows the grass cutting unit working with the collection trailer.

WATCH THE FIELD VIDEO

SPECIFICATION / 12

Source: original manufacturer YouTube demonstrations. Scenes show family variants; colour, row count, hitch and fitted equipment may differ from the selected order. Manufacturer branding is removed without changing the illustrated working arrangement.

A clear specification. A reliable supply partner.

Agricultural machinery sourcing from Türkiye for importers, distributors, dealers and commercial partners.

SEND US YOUR MACHINE BRIEF

Crop & application
Maize or grass; fresh feeding, silage or pre-cut processing.

Machine & tractor
A2Z code, required width, tractor power, PTO and linkage.

Equipment package
Header, folding, hydraulics and trailer arrangement.

Quantity & destination
Number of units, delivery country and destination port.

HOW A2Z SUPPORTS YOUR ORDER

Configuration review
Align the machine and included equipment with the requirement.

Export coordination
Coordinate sourcing, the commercial offer and shipment.

Before loading
Factory photographs and videos support the pre-loading review.

Parts & after-sales support
Discuss spare parts and support for the selected machine.

agriculture@a2zeximco.com

a2zeximco.com/en/catalogs

A2Z references identify supply families. Final equipment and technical specifications follow the agreed quotation.

SOURCE REGISTER / 16 OCTOBER 2026 **PRODUCT DATA** **ORIGINAL FIELD VIDEOS**

Technical basis: current Özbudak product pages. Photography: original manufacturer video previews and supplied reference photographs.